

10/500487



PCT / IB 0 2 / 0 5 7 9 8

0 6 . 0 2 . 0 3



INVESTOR IN PEOPLE

# **PRIORITY DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 20 FEB 2003

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subject the company to certain additional company law rules.


Signed

*W. Evans*

Dated 10 January 2003

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

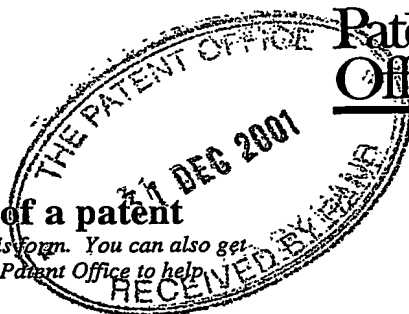

31 DEC 2001

1. Your reference 207007/PRS/VP  
2. Patent application number 0131117.4  
(The Patent Office will fill in this part) 02JAN02 E684965-1 D00068  
P01/7700 0.00-0131117.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)  
NOKIA CORPORATION  
KEILALAHDENTIE 4  
FIN-02150 ESPOO  
FINLAND

Patents ADP number (if you know it)

7652217001

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention  
FREQUENCY HOPPING SPREAD SPECTRUM  
COMMUNICATION SYSTEM

5. Name of your agent (if you have one)  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
PAGE WHITE & FARRER  
54 DOUGHTY STREET  
LONDON  
WC1N 2LS  
UNITED KINGDOM

Patents ADP number (if you know it)

1255003 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body  
See note (d))  
YES

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

## Continuation sheets of this form

Description	8
Claim(s)	1
Abstract	1
Drawing(s)	6

10. If you are also filing any of the following, state how many against each item.

## Priority documents

### Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination Patents Form 10/77)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

31 DEC 2001

12. Name and daytime telephone number of person to contact in the United Kingdom

P R SLINGSBY

020 7831 7929

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

## FREQUENCY HOPPING SPREAD SPECTRUM COMMUNICATION SYSTEM

The present invention relates to a frequency hopping spread spectrum communication system.

In most countries, the part of the spectrum commonly known as the Industry Scientific Medicine or ISM band (in the region of 2.4GHz) is largely unregulated, meaning that no licence is needed to make electromagnetic transmissions in this band.

In this unruly part of the spectrum, frequency hopping spread spectrum systems have been found to have good performance. In these systems, the carrier frequency of a modulated information signal changes or hops periodically to another (or possibly the same) frequency of a set of possible frequencies called the hop set. The hopping sequence is governed by the spreading code. Figure 1 shows the time/frequency occupancy of an exemplary communication between two nodes of a frequency hopping spread spectrum system. Thus, because the frequency hopping spread spectrum system is continually hopping between parts of the spectrum, the effect of narrow band interference in a particular region is limited.

The present invention is concerned with the operation of a frequency hopping spread spectrum communication system in the presence of a "persistent interferer" such as, for example, a microwave oven or a WLAN network operating at a fixed region of the spectrum.

Persistent interferers present two distinct problems to this kind of system.

### (i) "System Performance"

Although the use of a frequency hopping spread spectrum system *per se* limits the degradation in system performance caused by a persistent interferer, the effect on system performance can be significant, especially in the presence of several persistent interferers.

### (ii) "System Compatibility"

WLANs often transmit data in large packets. The presence of a nearby frequency hopping spread spectrum regularly hopping into the region of the

spectrum used by the WLAN during the transmission of a large packet can have a devastating effect on the WLAN's performance.

With this background in mind, according to the invention, there may be provided a method of operating a frequency hopping spread spectrum comprising a central node and dependent nodes which communicate over a time division duplexed, frequency hopping channel, alternate time-wise frequency/time slots being allocated for central node and dependent node transmission, wherein a first of said dependent nodes is not permitted to transmit in a frequency/time slot which immediately succeeds, time-wise, a frequency/time slot in which the central node transmitted to another of said dependent nodes, comprising the steps of:-

the central node maintaining a black-list of worse-performing frequency bands in the channel, and transmitting a dummy packet in a frequency/time slot immediately preceding, time-wise, a frequency/time-slot allocated for possible dependent node transmission at a frequency band which is black-listed.

By virtue of these features, the central node is able to preventatively forestall the use of the worse-performing frequency bands without any additional dedicated signaling protocols. By preventing the use of the worse-performing frequency bands, the method of the present invention represents a much less disruptive influence on neighbouring ISM-band systems.

Exemplary embodiments of the invention are hereinafter described with reference to the accompanying drawings, in which:

Figure 1 shows the time/frequency occupancy of a frequency hopping spread spectrum communication system;

Figure 2 shows a frequency hopping spread spectrum communication system having 5 nodes;

Figure 3 shows a hardware block diagram for a node of Figure 2;

Figure 4 show a diagram illustrating the operation of the system;

Figure 5 shows the time/frequency occupancy of the channel of the Figure 2 system in the presence of a persistent interferer; and

Figure 6 shows time/frequency occupancy of the channel of Figure 2 system where 2 black-listed frequency band are removed from the hop set.

Figure 2 shows a frequency hopping spread spectrum system, generally designated 5, operating in the ISM band. The system 5 comprises five nodes arranged as a piconet, in which a node 10 serves as the master node and the other four nodes serve as slave nodes 12a, 12b, 12c and 12d. These devices are lower power RF devices, preferably operating in accordance with the Bluetooth protocol. Within the system 5, communication takes place, bidirectionally, between the master node 10 and any of the slave nodes 12a, 12b, 12c and 12d. No communication takes place directly between the slave nodes themselves.

Each node 10,12 is identical having the same hardware and the same software enabling it to be operable to act as a master node or a slave for a given network, or possibly acting as the master node for a first network while simultaneously acting as a slave node for a second network.

In more detail, referring to Figure 3, each node 10,12 comprises a transmitter 20, a receiver 30 and a control processor 40. The transmitter 20 comprises a baseband modulator 21 to which baseband data for transmission is supplied by the control processor 40. The baseband modulator produces a modulated data signal and feeds it to an upconverter 22. The upconverter 22 shifts the modulated data signal to a frequency dictated by a frequency synthesiser 23 for transmission by an antenna 25. The output frequency of the frequency synthesiser 23 is controlled by a spreading code output by a code generator 24. The receiver 30 comprises a complementary architecture. A downconverter 32 shifts the signal received via an antenna 35 to a lower frequency, governed by the output frequency of a frequency synthesiser 33, and feed this frequency-shifted signal to a demodulator 31 for demodulation to baseband data. The output frequency of the frequency synthesiser is controlled by a locally generated spreading code output from a code generator 34. Synchronization and tracking circuitry 36 ensure that the locally generated carrier synchronises sufficiently well to the received carrier so that correct despreading of the received signal is possible.

Figure 4 show a diagram illustrating the operation of the system. A time line 108 shows the system in various phases of operation: initialisation 110, evaluation 120, and configuration 130. The time in which the evaluation phase takes place is referred to as the evaluation interval,  $T_{eval}$ , and the time in which the evaluation phase and the configuration phase take place is referred to as an epoch,  $T_{epoch}$ .

On initialisation, each slave node 12, as it joins the piconet, is given a local piconet address, by which the master node addresses the slave node, and is synchronised to follow a hop sequence  $F$  within the frequency range comprising frequency bands  $F1$  to  $F8$ , the portion of the hop sequence shown in Figure 1 being  $F1, F5, F3, F2, F7, F2, F8, F6, F3$  and the corresponding time/frequency slot being labeled 100a-i. Each time slot in the hop sequence is alternately reserved for transmission by the central node 10 (D slots) and transmission by the dependent nodes (U slots). In Bluetooth, the maximum number of slaves in a single piconet is 7. System parameters, for example,  $T_{eval}$  and  $T_{epoch}$  are also set in this initialisation phase.

After initialisation, for the evaluation interval,  $T_{eval}$ , communication between each slave node 12 and the master node 10 takes place as illustrated by flowchart (i) of Figure 4,

If a slave node, say node 12a, wants to transmit a packet to the master node 10, it waits until the next available U time/frequency slot, for example, time/frequency slot 100a (shown in Figure 1), and makes its transmission during this time/frequency slot 100a, step 122, and waits for an acknowledgement from the master node 10, step 124, on the next D slot, namely time/frequency slot 100b (shown in Figure 1).

If an acknowledgement (ACK) is not received in time/frequency slot 100b, then the slave node 12a assumes that the packet transmitted in time/frequency slot 100a was not properly received by the master node 12 (step 126). The failure of the master node to receive the incoming packet could have been because of collision with an attempted packet transmission by another slave node 12b-d in the same system, collision with a neighbouring similar system having a different master node, or interference from the previously-mentioned persistent interferers such a microwave or a WLAN network.

The slave node 12a maintains a record for the evaluation interval,  $T_{eval}$ , of how many times it has tried to make a transmission on each frequency band  $F1-8$ ,  $T_i$ , and how many of those times the transmission was successful,  $NS_i$  and, from this information, calculates, at step 128, a local interference indices  $I_{Fi}$  (where in this exemplary system  $i=1$  to 8 because there are eight frequency bands in the channel). In this case, the slave node 12a calculates a new value for  $I_{F1}$  because the packet transmission was attempted on U time slot 100a, which occupies frequency band  $F1$ , according to the relationship

$$I_{Fi} = (T_i - NS_i) / T_i \quad (1)$$

This process is repeated every time the slave node 12a fails to successfully transmit a packet or to transmit a packet for the first time. Each slave node 12 independently carries out the same process.

In this way, each slave node 12 builds up a picture over the evaluation interval,  $T_{eval}$ , of its own local view of how prone to interference each frequency band,  $F_1$  to  $F_8$ , in the channel is. This picture is encapsulated in the interference indices  $I_{Fi}$  stored at each slave node 12.

At the end of the interval, the system moves into the configuration phase 130 as illustrated by flowchart (ii) in Figure 4. The master node 10 broadcasts on a D time/frequency slot a command addressed to a selected node to transmit its local interference indices  $I_{Fi}$  to the master node on the next U slot (step 132). At step 134, the addressed slave 12 receives the request and, at step 136, transmits the interference indices  $I_{Fi}$ . At steps 138, 140 and 132, if the master node 10 does not properly receive the interference indices  $I_{Fi}$ , it re-makes its request on the next D time/frequency slot. The master node 10 repeats this interrogation process until it has successfully received the local interference indices for each dependent node (step 142).

With the interference indices  $I_{Fi}$  from each slave node 12, the master node 10 calculates the system-aggregate performance of each frequency band  $F_i$  in the channel, in particular the system-aggregate probability of error free transmission over the previous interval  $P_t$  (step 144),

$$P_t(F_i) = \sum (I_{Fi} / n) \quad (2)$$

where  $n$  = the number of slave nodes.

Based on this, at step 146, the master node 10 identifies the worst-performing frequency bands by comparing their respective  $P_t$  over the last evaluation interval 120 and creates a black list of the two worst-performing frequencies.

At the end of the current epoch, i.e. after the configuration phase, the system again enters the evaluation phase 120. Now, armed with the knowledge of which frequencies are worst-performing the master nodes 10, 12 again follow the hop sequence  $F$ , but (i) the master node 10 omits to transmit on the two black-listed frequency bands because it knows that they are known to be poorly performing, and (ii) the master node 10 transmits a dummy packet in the frequency/time

slot immediately preceding, time-wise, a frequency/time slot which is transmitted on a frequency band which has been black-listed. The dummy packet is addressed to a slave node piconet address for which there is no slave node currently assigned. By sending the dummy packet, the master node 10 is telling the other real, slave nodes 12 that the next U slot is reserved for the acknowledgment of the addressed (dummy) slave node 12, and in so doing, by indirect means, prevents transmission on the black-listed frequency band. In the case when the piconet is full and there are 7 slave nodes, the master node 12 pre-emptively puts one of the slave nodes into park mode to free up a dummy piconet slave address. In park mode, a slave node is merely maintaining synchronisation with the piconet and needs to be re-activated before it can again communication with the master node.

The system operation proceeds as before, except during the second and subsequent configuration phases 130, the parameters  $P_t(F_i)$  are adjusted according to the parameter  $\alpha$  (where  $0 \leq \alpha \leq 1$ ) is and the value of the  $P_t$  calculated during the previous configuration phase,  $P_{t-1}$ .

$$P_t(F_i) = \alpha \cdot P_t(F_i) + (1 - \alpha) \cdot P_{t-1}(F_i) \quad (3)$$

This modification of  $P_t(F_i)$  has the effect, to an extent governed by the value of  $\alpha$ , of making  $P_t$  reflect not only the frequency bands performance over the evaluation interval but also the historic performance over previous evaluation intervals.

If the situation is now considered where the system 5 is being used in the vicinity of a WLAN. This network sporadically transmits relatively long packets of information in an area of the spectrum which falls within the frequency bands used by the system 5. An example of the interference of this neighbouring WLAN is shown in Figure 5 and denoted 102. It will be appreciated that for the portion of the hopping sequence F shown in Figure 5, the F7 and F8 frequency bands are completely swamped by the long packet transmission of the WLAN. By comparison with Figure 1, we can see that frequency/time slots 100e and 100g have been rendered useless. Although only a small portion of the hopping sequence is visible in Figure 5 if we assume that transmissions of the WLAN have disrupted F7 and F8 for much of an evaluation interval, then it will be appreciated that any slave node 12 which tries to make use of F7, F8 is not likely to meet with much success. As a result, the slave nodes all calculate during the evaluation phase 120 local interference indices for  $I_{F7}$  and  $I_{F8}$ , according to equation (1) above, which are considerably smaller than for the indices of the other frequency bands F1-6. Accordingly, during the

configuration phase 130, the master node 10 collects the local interference indices from each slave node 12 and calculates a system-aggregate probability of error-free transmission  $P_t$  for each frequency F1 to F8 according to equation (2) and adjusts it according to historic information as per equation (3), the master node identifies frequency bands F7 and F8 as the worst performing, i.e. most interfered with, frequency bands and so places them on a black list (step 146). At the start of the next evaluation phase 120, with this knowledge of which frequency bands have been black listed, the master node 10 refrains from transmitting on any frequency/time slots which fall in a black-listed frequency band. With reference to Figure 1, it will be appreciated that there are no D slots which are transmitted on F7 or F8 in the example shown. However, there are two U slots 100e, transmitted on F7, and 100g transmitted on F8. In order to forestall transmission on these frequency/time slots, the master node 10 transmits to a dummy slave node, say a fifth slave node 12e, which is not shown in Figure 1 because it does not exist. By virtue of this transmission, all the slave nodes 12a-d are not permitted to transmit on the immediately succeeding U slots, 100e and 100g. In this way, the system 5 aims to avoid in advance the RF hot spots in the local environment as shown in Figure 6. This not only improves its own system performance, but also makes the system 5 far more sociable in RF terms to neighbouring systems e.g. a WLAN.

Once a frequency band has been black-listed it is no longer in use by the system and hence no fresh interference index is being calculated by the slave nodes. Therefore, the master node 10, when at step 146 it is deciding upon the black-listed channels for the next epoch, uses the value of the interference indices, which the currently black-listed channels had immediately before they were black listed scaled by  $\beta^x$  where  $\beta < 1$  and  $x$  is the number of epochs that the frequency band has been on the black list, as the basis of comparison with the newly-gathered interference indices from the unblack-listed frequency bands.

It will be appreciated that the selection of the system parameters  $\alpha$  and  $\beta$  have a great influence on under what circumstances and for how long a given frequency band is black listed. For example, the greater the value of  $\alpha$ , the greater the weighting given to the environment in only the previous evaluation phase 120. Whereas, if  $\alpha$  has a small value, then greater weighting is given to the conditions in the environment in the past. Regarding  $\beta$ , if  $\beta$  is small, then the black-listed channels have a greater chance of being quickly taken off the black list as compared with when  $\beta$  is close to 1.

It will be appreciated that for ease of description and for concision a simplified embodiment has been described. For example, the number of frequency bands

in the channel was 8. But in a practical system there are likely to be many more frequency bands. According to the FCC regulations, a frequency hopping system in accordance with this invention operating in the ISM band must hop onto 75 out of the possible 79 frequency bands available. Although in the described embodiment, two frequencies bands are placed onto the black list. In practice, this number may be dictated or at least constrained by governmental regulations.

In the described embodiment of the invention, the master node 10 collates the interference indices  $I_{Fi}$  by interrogating the slave nodes 12 in turn. In another embodiment, the slave nodes could sent this information after a predetermined time. In this case of course, the timing for the slave nodes to dispatch this information to the master node needs to be such that all the slave nodes access to the same U slot, to prevent excessive collisions between the slave nodes.

In the described embodiment of the invention, the evaluation period for each frequency band, but in other embodiments, the evaluation period for each node can be different , even substantially different.

## CLAIMS

1. A method of operating a frequency hopping spread spectrum comprising a central node and dependent nodes which communicate over a time division duplexed, frequency hopping channel, alternate time-wise frequency/time slots being allocated for central node and dependent node transmission, wherein a first of said dependent nodes is not permitted to transmit in a frequency/time slot which immediately succeeds, time-wise, a frequency/time slot in which the central node transmitted to another of said dependent nodes, comprising the steps of:-

the central node maintaining a black-list of worse-performing frequency bands in the channel, and transmitting a dummy packet in a frequency/time slot immediately preceding, time-wise, a frequency/time slot allocated for possible dependent node transmission at a frequency band which is black-listed.

2. A method as in claim 1, wherein the central node refrains from transmitting on a black-listed frequency/ time slot.

3. A Bluetooth node comprising means for maintaining a black-list of worse performing frequency bands, and means for transmitting a dummy packet in a frequency/time slot immediately preceding, time-wise, a frequency/time slot allocated for possible slave node transmission at a frequency band which is black-listed.

4. A Bluetooth node as in claim 3, comprising means for refraining from transmitting on a given frequency/time slot on the basis of the black-list.

### Abstract

A method of operating a frequency hopping spread spectrum, preferably a Bluetooth piconet, comprising a central node and dependent nodes which communicate over a time division duplexed, frequency hopping channel, alternate time-wise frequency/time slots being allocated for central node and dependent node transmission, wherein a first of said dependent nodes is not permitted to transmit in a frequency/time slot which immediately succeeds, time-wise, a frequency/time slot in which the central node transmitted to another of said dependent nodes, comprising the steps of:- the central node maintaining a black-list of worse-performing frequency bands in the channel, and transmitting a dummy packet in a frequency/time slot immediately preceding, time-wise, a frequency/time slot allocated for possible dependent node transmission at a frequency band which is black-listed. (Figure 5)

Figure 1



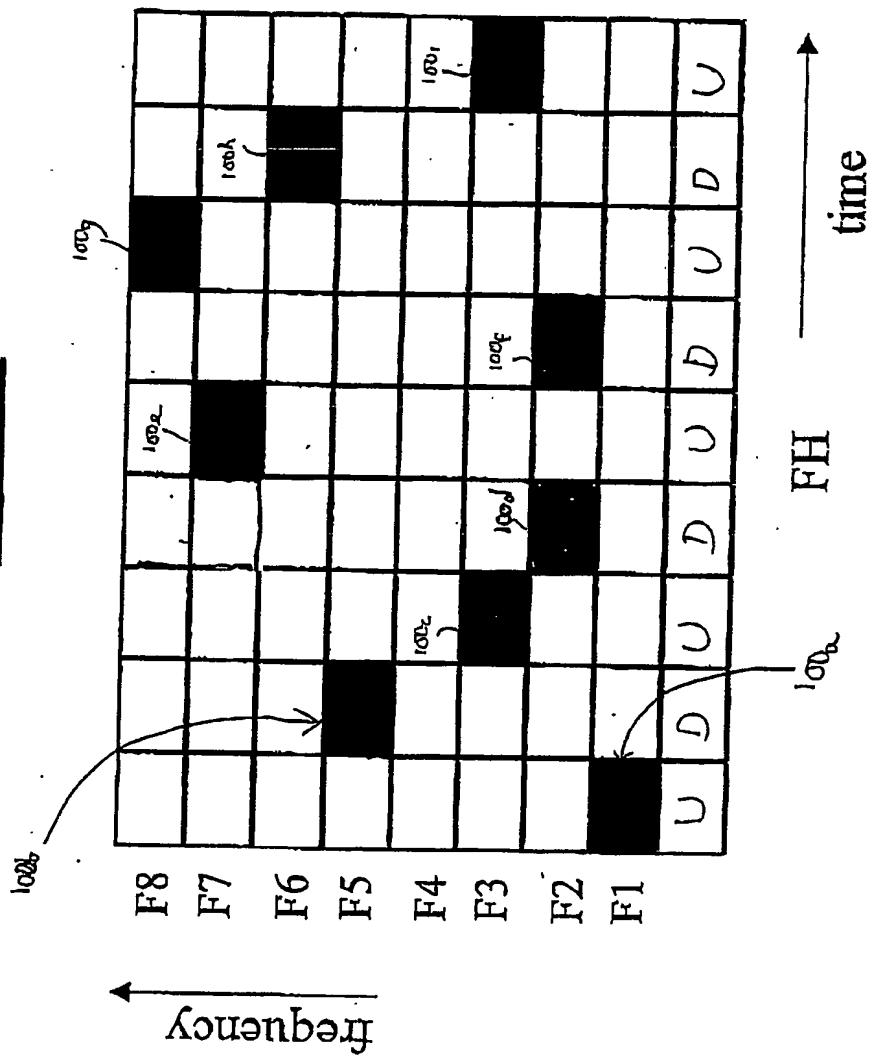


Figure 2


5




$\frac{2}{6}$




12b



12c




12d



12a

**Figure 3**

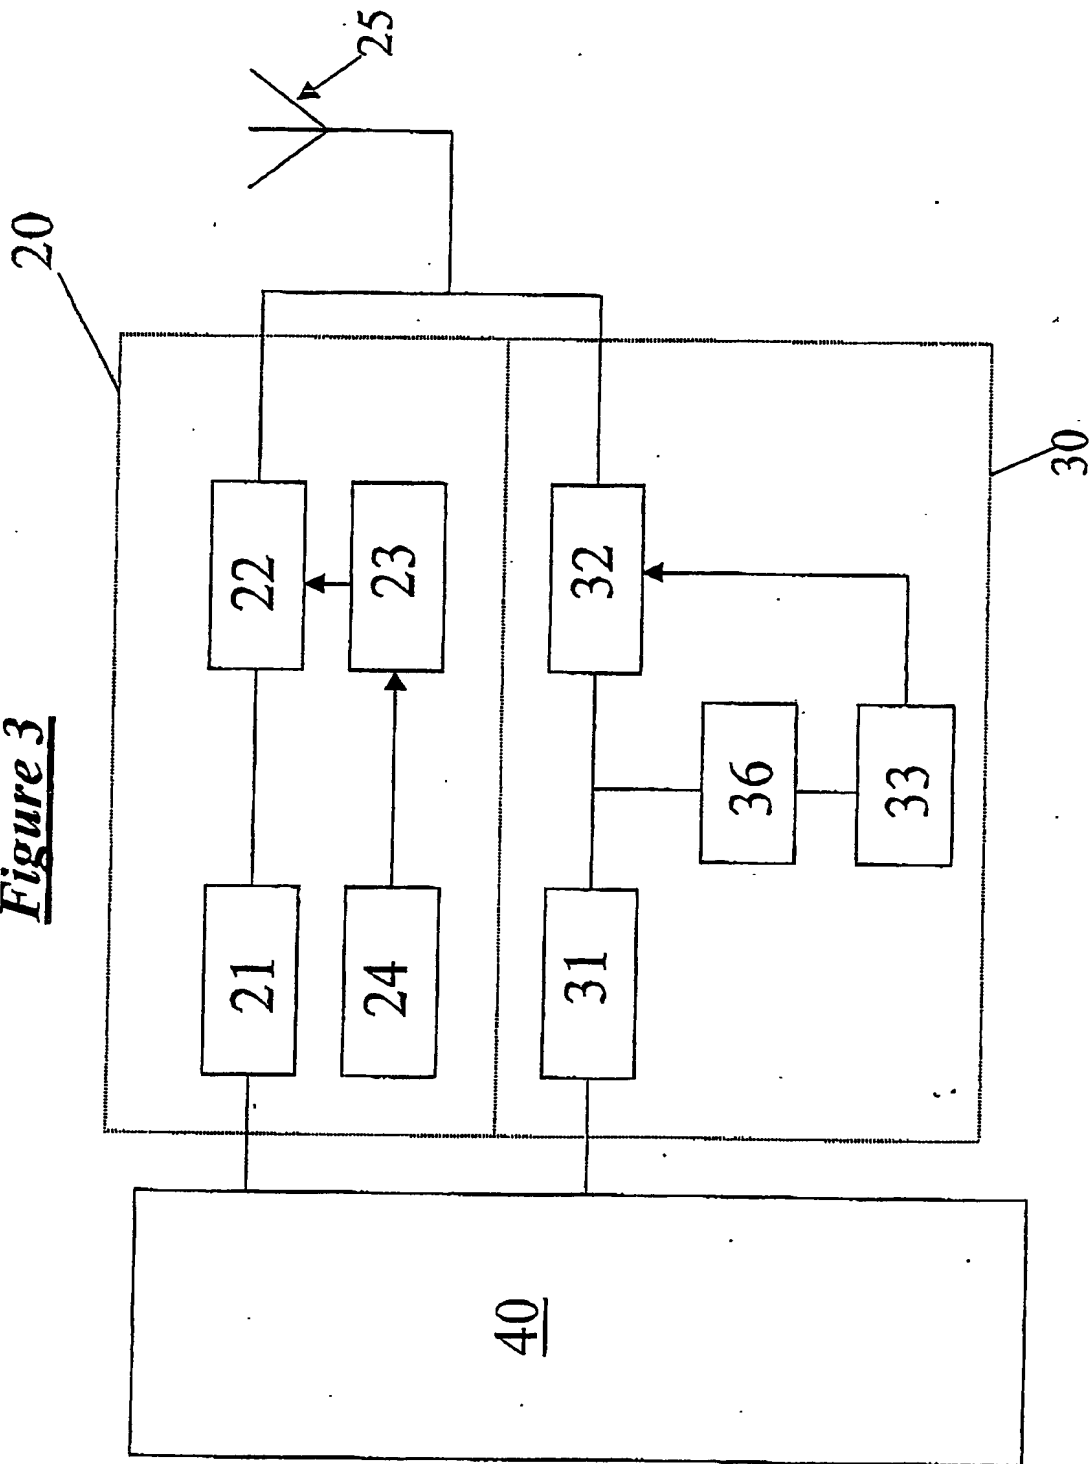


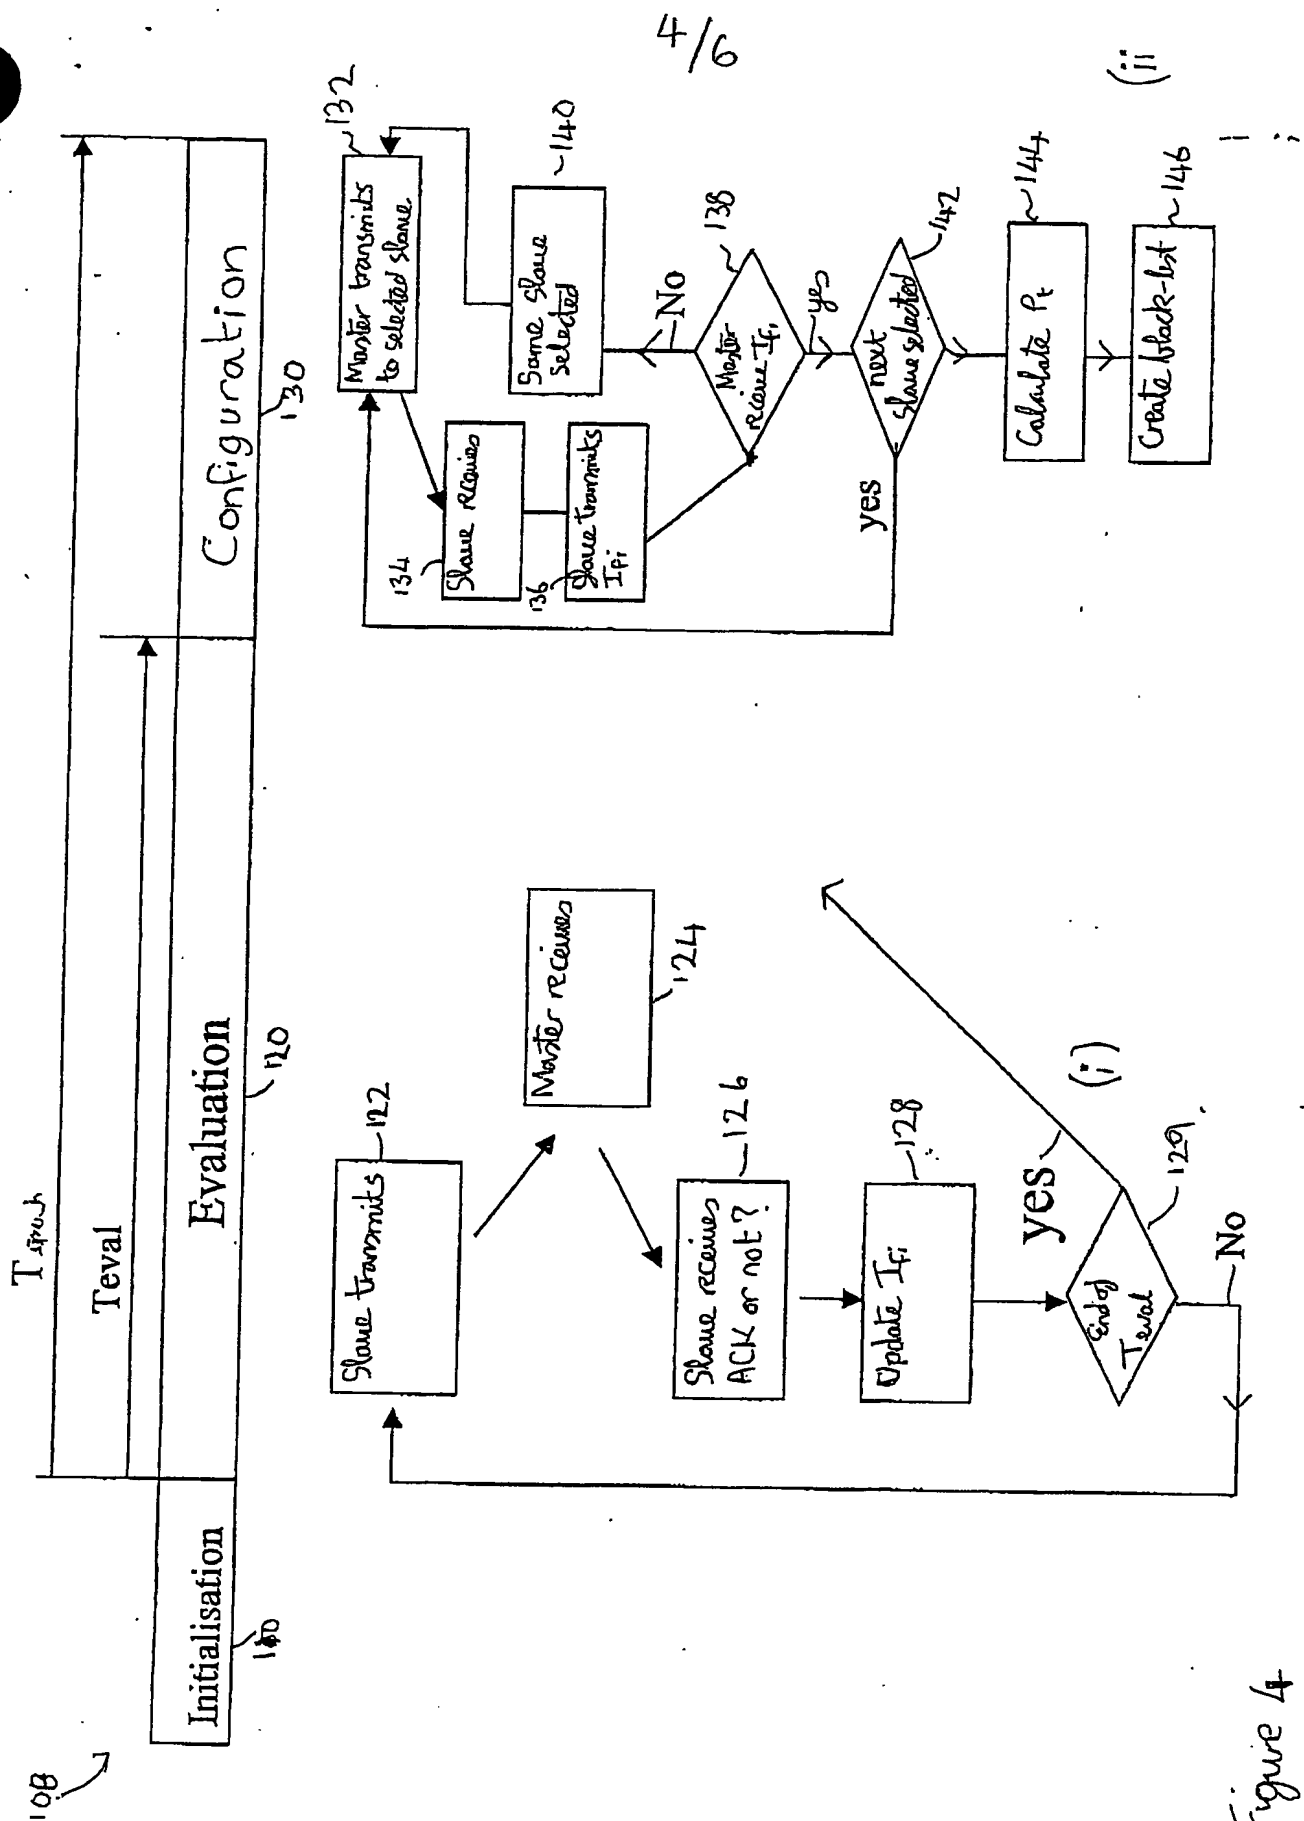


Figure 4



6/6

Figure 6

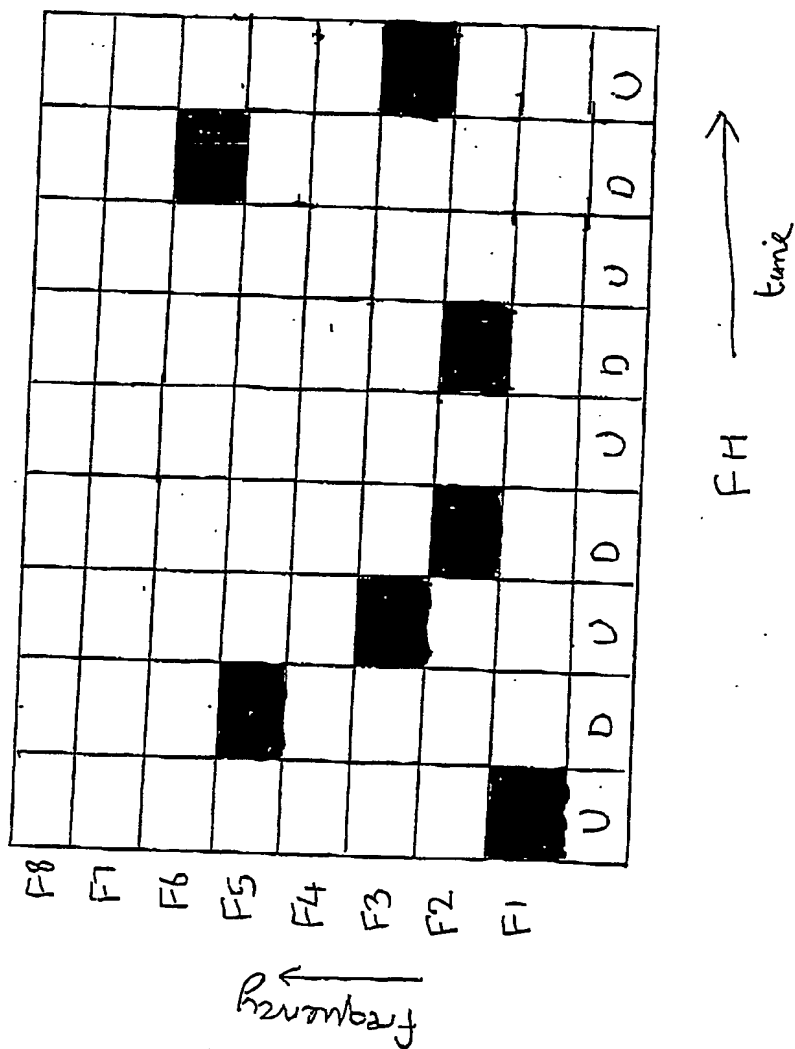

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**